


ME by Starck Toilet floorstanding for shower toilet seat # 216959..00 / 216959..00

| < 370 mm > |

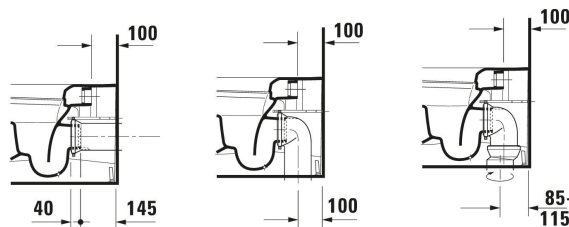

Toilet floorstanding for shower toilet seat	Dimension	Weight	Order number
Back to wall version, Flush water quantity: 4,5/3 l, Washdown model, Flushing rim: Closed, Outlet drain: horizontal, Position outlet: Back, Flush principle: washdown model, Incl. mounting material, Unified Water Label (UWL) Class: 1			
Colors			
00 White Alpin 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
Variant			
♦ White High Gloss, Flush water quantity: 4,5 l, Flushing rim: Semi-open		29.000 kg	216959..00
♦ White High Gloss, HygieneGlaze, Flush water quantity: 4,5 l, Flushing rim: Semi-open		29.000 kg	216959..00
Sanitary ceramics with the special WonderGliss surface finish will remain clean and attractive-looking for a long time to come. When ordering WonderGliss please add a "1" as eleventh digit to the model number.			
Accessory			
Pre-installation set	135 x 105 mm	0.43 kg	005072
Vario Connector Set	260 x 220 mm	0.385 kg	100730
Vario Connector Set	220 x 260 mm	0.45 kg	100692
Vario Connector Set	220 x 260 mm	0.7 kg	100691
Suitable products			
Shower toilet seat Suitable for series ME by Starck, Starck 2, Starck 3, DuraStyle, Bento Starck Box, White, Automatic close, Seat material type: Duroplast, Lid material type: Duroplast, Adjustable shower jet position level: 5 Steps, Controllable spray jet intensity steps: 3 Steps, Controllable spray jet temperature steps: 4 Steps, Adjustable shower jet position level: 5 Steps, Rearwash, Ladywash, Pulsing shower spray: Oscillating, Remote control, Controller, Self-cleaning shower nozzle/shower head, Decalcification function, Holiday mode, Night light, Protection type: IPX4, 373 x 539 mm			611000

ME by Starck Toilet floorstanding for shower toilet seat #
216959..00 / 216959..00

|< 370 mm >|

Shower toilet seat Suitable for series ME by Starck, Starck 2, Starck 3, Darling New, Bento Starck Box, Automatic close, Adjustable shower jet position level: 5 Steps, Controllable spray jet intensity steps: 3 Steps, Controllable spray jet temperature steps: 4 Steps, Adjustable shower jet position level: 5 Steps, 365 x 520 mm Rearwash, Ladywash, Pulsing shower spray: Oscillating, Number of programmable user profiles: 4, Self-cleaning shower nozzle/shower head, Decalcification function, Energy saving mode: Adjustable, Night light, 365 x 520 mm	613000
--	--------

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding.
 Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.*