


ME by Starck Toilet close-coupled # 217009..00 / 217009..00

|< 370 mm >|

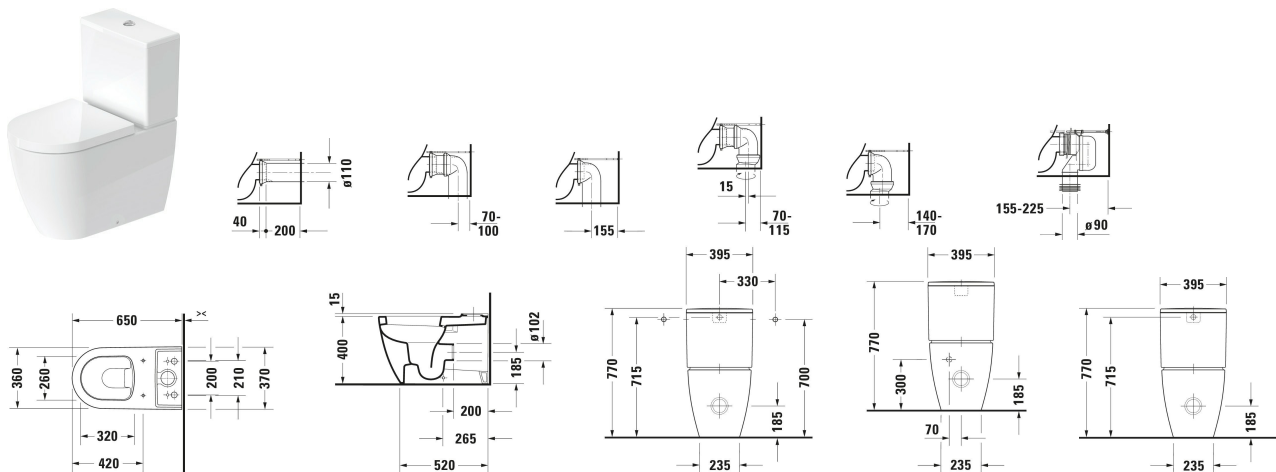

Toilet close-coupled	Dimension	Weight	Order number
Flush water quantity: 4,5/3 l, Washdown model, Flushing rim: Closed, Outlet drain: horizontal, Position outlet: Back, Incl. cistern: No, Flush principle: extractor/siphon jet, For bowl mounted cistern, Length adjustable, Incl. mounting material, Outlet dimensions for Vario connecting bend vertical: 155 - 225 mm, Outlet dimensions for Vario outlet set vertical/horizontal: 70 - 170 mm, Unified Water Label (UWL) Class: 1			
Colors			
00 White Alpin 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
Variant			
♣ White High Gloss, Flush water quantity: 4,5 l, Flush principle: washdown model		35.440 kg	217009..00
♣ White High Gloss, HygieneGlaze, Flush water quantity: 4,5 l, Flush principle: washdown model		35.440 kg	217009..00
Sanitary ceramics with the special WonderGliss surface finish will remain clean and attractive-looking for a long time to come. When ordering WonderGliss please add a "1" as eleventh digit to the model number.			
Accessory			
Vario connecting bend Diamter of inlet: 75 mm, Diameter drain: 90 mm	351 x 134 mm	0.87 kg	899025
Suitable products			
Cistern Incl. mechanism, Dual Flush, Water connection position: Right, Left, Surface of push button: Chrome, 395 x 180 mm	395 x 180 mm		093800

ME by Starck Toilet close-coupled # 217009..00 / 217009..00

|< 370 mm >|

Cistern Incl. mechanism, Dual Flush, Water connection position: Bottom left 3/8", Surface of push button: Chrome, Concealed connection, 395 x 180 mm	395 x 180 mm	093810
Toilet seat Automatic close: Yes, Removable Seat, Hinge material: Stainless steel, 374 x 438 mm	374 x 438 mm	002019
Cistern Incl. mechanism, Dual Flush, Water connection position: Middle 1/2", Surface of push button: Chrome, Concealed connection, 395 x 180 mm	395 x 180 mm	093840
Toilet seat Automatic close: No, Hinge material: Stainless steel, 374 x 438 mm	374 x 438 mm	002011

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.