


**DuraSystem® Mechanical actuator plate for WC A1 #**  
WD5001..1000 / WD5001..1000 / WD5001..1000 / WD5001..1000  
/ WD5001..1000 / WD5001..1000

|< 217 mm >|

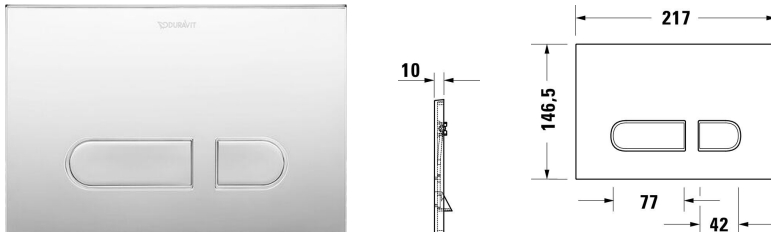

Mechanical actuator plate for WC A1	Dimension	Weight	Order number
Plastic, Dual Flush, Flush operation: Mechanical, Flush operation technology: Manual, Type of installation: surface mounted, Flush-mounted, Incl. installation frame, Including mounting kit, Incl. push rod			
<b>Colors</b>			
00 White Alpin 03 Black Matte 04 Brushed Bronze 10 Chrome 34 Polished Gold 70 Brushed Stainless Steel			
<b>Variant</b>			
		0.300 kg	WD5001..1000
		0.300 kg	WD5001..1000
		0.313 kg	WD5001..1000
		0.300 kg	WD5001..1000
		0.200 kg	WD5001..1000
		0.200 kg	WD5001..1000
<b>Infobox</b>			
For flush mounting (except for wet installation and units with shortened overall height), the mounting frame #WD6001 011 000 (white) or #WD6001 021 000 (high-gloss chrome) must be ordered			
<b>Suitable products for</b>			
Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards	500 x 155 mm	14.2 kg	WD1011

**DuraSystem® Mechanical actuator plate for WC A1 #**  
**WD5001..1000 / WD5001..1000 / WD5001..1000 / WD5001..1000**  
**/ WD5001..1000 / WD5001..1000**

| < 217 mm > |

Installation element dry installation for WC Odour extraction, Fan activation: Manual, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards	500 x 155 mm	17.5 kg	WD1012
Installation element wet installation for WC Type of installation: For walling in and out, Type of mounting: Wet installation, Max. projection toilet: 700 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow	445 x 153 mm	8.1 kg	WD1015
Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards	500 x 155 mm	14 kg	WD1016
Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards	500 x 155 mm	13.5 kg	WD1017
Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards	500 x 155 mm	15 kg	WD1018
Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards	500 x 155 mm	14.5 kg	WD1019
Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards	500 x 155 mm	16 kg	WD1020
<b>Installation accessories for ,</b>			
Installation frame Type of installation: Flush-mounted	290 x 35 mm	0.3 kg	WD6001

**DuraSystem® Mechanical actuator plate for WC A1 #**  
WD5001..1000 / WD5001..1000 / WD5001..1000 / WD5001..1000  
/ WD5001..1000 / WD5001..1000

---

|< 217 mm >|

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding.  
Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.*