


DuraSystem® Electronic actuator plate for urinal A2 # WD5006..3000 / WD5006..3000

| < 130 mm > |

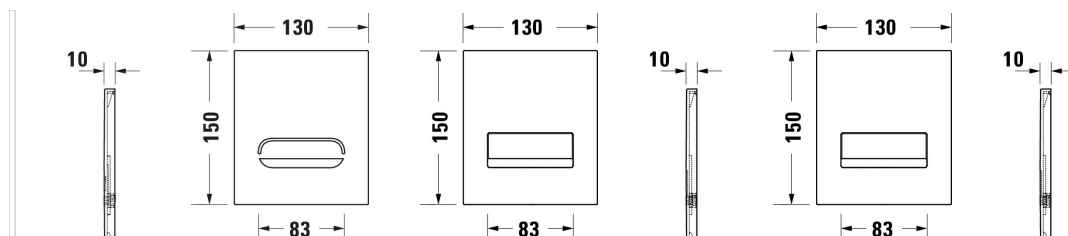

Electronic actuator plate for urinal A2	Dimension	Weight	Order number
battery supply, Cast zinc, Single Flush, Flush operation: Infra-red controlled, Flush operation technology: Touchless, Type of installation: surface mounted, Incl. installation frame, Including mounting kit, Protection type: IPX4			
Colors			
00 White Alpin 10 Chrome			
Variant			
		0.800 kg	WD5006..3000
		0.800 kg	WD5006..3000
Suitable products for			
Installation element for urinal Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Height adjustable: 240 mm, Flush operation: Mechanical, Electronic, Flush operation position: Front, Material of cross bars: Wood, Suitable for panelling with plasterboards, Meter marking, Center marker, Height adjustable cross bars: 240 mm, Incl. drain pipe clamp DN 50, Incl. plinth legs, Incl. HT- outlet bend DN 50, Incl. mounting accessories for single installation, Incl. mounting accessories for lightweight construction, Inkl. schallgedämmte Wandscheiben G1/2	500 x 170 mm	12 kg	WD3004

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.