


# SensoWash® Starck f Compact shower toilet Lite # 650001012004310

| < 378 mm > |

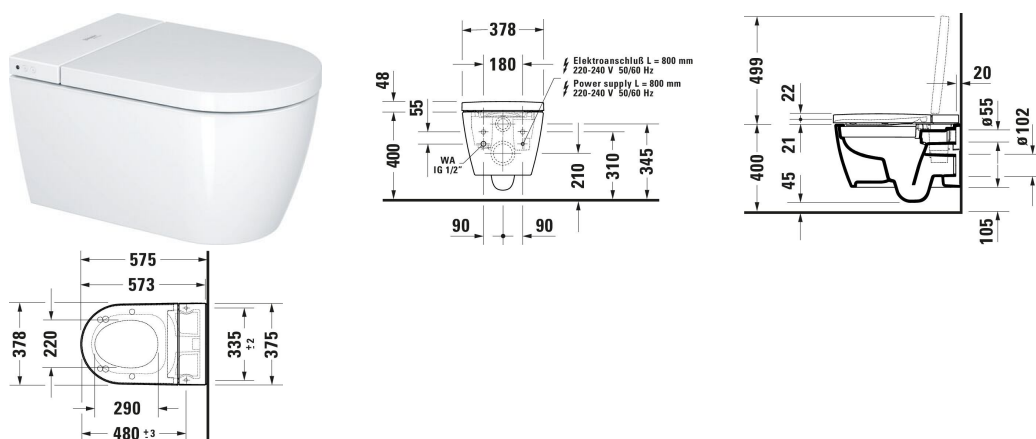

Compact shower toilet Lite	Dimension	Weight	Order number
Wall-mounted, Flush construction: Washdown model, Flushing rim: Rimless, HygieneGlaze, Rearwash, Ladywash, Pulsing shower spray: Oscillating, Adjustable shower jet position level: Infinitely adjustable, Controllable warm air dryer steps: Infinitely adjustable, Seat temperature level: Infinitely adjustable, Controllable spray jet temperature steps: Infinitely adjustable, Self-cleaning shower nozzle/shower head, Decalcification function, Holiday mode, Night light			
<b>Colors</b>			
00 White Alpin			
<b>Variant</b>			
575 mm, White, Seat material type: Thermoplastic, Lid material type: Thermoplastic, Warm air dryer, Seat heater, Operation type: Remote control, App, Energy saving mode: Adjustable, Packaging dimensions: 378x575x405 mm, Unified Water Label (UWL) Class: 1, Protection type: IPX4		35.400 kg	650001012004310
<b>Installation accessories</b>			
Pre-installation set	135 x 105 mm	0.43 kg	005072
Noise reduction set		0.2 kg	005090
Vario Connector Set Suitable for series: SensoWash Starck f, For pre-wall carrier: with conduit pipe, 82-115 mm	220 x 60 mm	0.28 kg	100731
Descaling tablets	38 x 38 mm	0.1 kg	100725
Interface set	23 x 300 mm	0.45 kg	100729
Mounting Suitable for Wall-mounted bidet, Wall-mounted toilet	Ø 12 mm	0.28 kg	006500
<b>Suitable products</b>			

## SensoWash® Starck f Compact shower toilet Lite # 650001012004310

| < 378 mm > |

Mechanical actuator plate for WC A1 Plastic, Dual Flush, Flush operation: Mechanical, Flush operation technology: Manual, Type of installation: surface mounted, Flush-mounted, Incl. installation frame, Including mounting kit, Incl. push rod, 217 x 10 mm	217 x 10 mm	WD5001
Mechanical actuator plate for WC A1 Glass, Dual Flush, Flush operation technology: Manual, Type of installation: surface mounted, Flush-mounted, Incl. installation frame, Including mounting kit, Incl. push rod, 230 x 14 mm	230 x 14 mm	WD5002
Electronic actuator plate for WC A2 power supply, Glass, White, Dual Flush, Flush operation: Infra-red controlled, Flush operation technology: Automatic, Touchless, Manual, At the touch of a button, Type of installation: surface mounted, Incl. installation frame, Including mounting kit, Protection type: IPX4, 230 x 10 mm	230 x 10 mm	WD5003
Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm	500 x 155 mm	WD1011
Installation element dry installation for WC Odour extraction, Fan activation: Manual, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm	500 x 155 mm	WD1012
Installation element dry installation for WC Hygienic flush, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Electronic, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm	500 x 155 mm	WD1013
Installation element dry installation for WC Odour extraction, Fan activation: Automatic, Manual, At the touch of a button, Touchless, Hygienic flush, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Electronic, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm	500 x 155 mm	WD1014

# SensoWash® Starck f Compact shower toilet Lite # 650001012004310

| < 378 mm > |

<p>Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: 500 x 155 mm</p> <p>FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p>	WD1016
<p>Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: 500 x 155 mm</p> <p>FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p>	WD1017
<p>Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: 500 x 155 mm</p> <p>FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p>	WD1018
<p>Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: 500 x 155 mm</p> <p>FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p>	WD1019
<p>Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, 500 x 155 mm</p> <p>Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p>	WD1020

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.*