


## Bento Starck Box Washbowl # 2660133272

|< 1340 mm >|

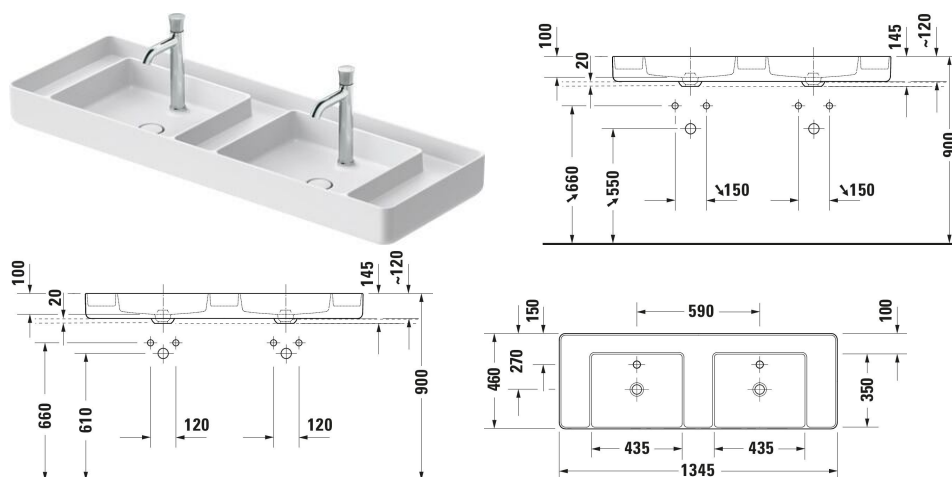

Washbowl	Dimension	Weight	Order number
Rectangular, Tap hole platform: No, Incl. slotted waste, 1340 mm			
<b>Colors</b>			
32 White Satin Matt			
<b>Variant</b>			
● ● White Satin Matt, Number of washing areas: 2, Number of faucet holes per wash area: 1 Middle, Overflow: No, grounded		36.000 kg	2660133272
<b>Accessory</b>			
Design siphon Brass, Outlet drain: horizontal, Suitable for Washbasin	70 x 425 mm	1.5 kg	005036
<b>Recommended faucets</b>			
single lever basin mixer L Ceramic cartridge, Height: 262 mm, Spout reach: 136 mm, Connection type for water supply connection: Flexible connecting hoses, Dimension of connection hose: 3/8", Spray mode: Normal spray, Aerator adjustable, recommended operating pressure: 1 - 5 bar, Noise class: I, 166 x 40 mm	166 x 40 mm		C11030002
single lever basin mixer XL Ceramic cartridge, Height: 322 mm, Spout reach: 166 mm, Connection type for water supply connection: Flexible connecting hoses, Dimension of connection hose: 3/8", Spray mode: Normal spray, Aerator adjustable, recommended operating pressure: 1 - 5 bar, Noise class: I, 196 x 40 mm	196 x 40 mm		C11040002

## Bento Starck Box Washbowl # 2660133272

|< 1340 mm >|

single lever basin mixer XL Chrome, Ceramic cartridge, Height: 317 mm, Spout reach: 160 mm, Connection type for water supply connection: Flexible connecting hoses, Dimension of connection hose: 3/8", Spray mode: Normal spray, Aerator adjustable, Temperature limit adjustable, recommended operating pressure: 1 - 5 bar, 48 x 195 mm	48 x 195 mm	WT1040002
single lever basin mixer L Chrome, Ceramic cartridge, Height: 280 mm, Spout reach: 140 mm, Connection type for water supply connection: Flexible connecting hoses, Dimension of connection hose: 3/8", Spray mode: Normal spray, Aerator adjustable, Temperature limit adjustable, recommended operating pressure: 1 - 5 bar, 48 x 175 mm	48 x 175 mm	WT1030002
single lever basin mixer XL Ceramic cartridge, Height: 265 mm, Spout reach: 155 mm, Connection type for water supply connection: Flexible connecting hoses, Dimension of connection hose: 3/8", Spray mode: Normal spray, Aerator, Temperature limit adjustable, recommended operating pressure: 1 - 5 bar, Unified Water Label (UWL) Class: 1, 50 x 200 mm	50 x 200 mm	TU1040002

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.*