

Faucet Accessories Shower rail # UV06000030.. / UV06000030.. / UV0600003C.. / UV0600003C..

|< 100 mm >|



Shower rail	Dimension	Weight	Order number
Hand shower holder: height adjustable			
Colors			
10 Chrome 46 Black Matt			
Variant			
mm, Chrome		0.320 kg	UV06000030..
700 mm, Black Matt		0.320 kg	UV06000030..
700 mm, Chrome		0.320 kg	UV0600003C..
700 mm, Black Matt		0.320 kg	UV0600003C..
Suitable accessories			
Hand shower Spray mode: Rain, Dimensions of water supply connection: 1/2", Silicone nubs	245 x 110 mm	0.16 kg	UV0650013
Hand shower Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Silicone nubs	245 x 110 mm	0.2 kg	UV0650015
Hand shower Spray mode: Rain, Pulse, Mono, Dimensions of water supply connection: 1/2", Spray mode selection: Push button, Silicone nubs	240 x 120 mm	0.24 kg	UV0650017
Stick hand shower Dimensions of water supply connection: 1/2", Silicone nubs	187 x 25 mm	0.14 kg	UV0640001
Stick hand shower Dimensions of water supply connection: 1/2", Silicone nubs	212 x 22 mm	0.18 kg	UV0640002
Suitable accessories for mm, Chrome			
Single lever shower mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Non-return valve in the hose connection, Noise class: II	209 x 133 mm	1.4 kg	B14230000

Faucet Accessories Shower rail # UV06000030.. / UV06000030.. / UV0600003C.. / UV0600003C..

| < 100 mm > |

Thermostatic shower mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Thermostat cartridge, recommended operating pressure: 1 - 5 bar, Safety lock at 38 °C, Diverter valve, Non-return valve in the hose connection, Noise class: II	260 x 118 mm	1.8 kg	B14220000
Single lever shower mixer for concealed installation Number of outlets: 1, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 86 mm	1.8 kg	B14210010
Single lever shower mixer for concealed installation Number of outlets: 1, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 87 mm	1.75 kg	B24210010
Single lever shower mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Non-return valve in the hose connection, Noise class: II	179 x 137 mm	1.3 kg	B24230000
Thermostatic shower mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Thermostat cartridge, recommended operating pressure: 1 - 5 bar, Safety lock at 38 °C, Diverter valve, Non-return valve in the hose connection, Noise class: II	260 x 113.5 mm	1.8 kg	B24220000
Single lever shower mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 3 - 5 bar, Non-return valve in the hose connection, Flow rate (3 bar): 18,5 l/min	209 x 140 mm	1.33 kg	DE4230000
Single lever shower mixer for concealed installation Number of outlets: 1, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 80 mm	1.8 kg	DE4210010
Single lever shower mixer for concealed installation Number of outlets: 1, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 97 mm	1.8 kg	WT4210010
Single lever shower mixer for exposed installation Chrome, Connection type for water supply connection: S-connections, Dimension of connection hose: 1/2", Centre distance: 150 mm ± 10 mm, Ceramic cartridge, recommended operating pressure: 1 - 5 bar	215 x 128 mm	0.9 kg	N14230000
Single lever mixer concealed set Number of outlets: 1, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts	115 x 83 mm	0.7 kg	N14210007

Faucet Accessories Shower rail # UV06000030.. / UV06000030.. / UV0600003C.. / UV0600003C..

|< 100 mm >|

Hand shower MinusFlow, Spray mode: Rain, Dimensions of water supply connection: 1/2", Flow rate (3 bar): 9 l/min, Silicone nubs	245 x 110 mm	0.16 kg	UV0652013
Hand shower MinusFlow, Spray mode: Rain, Dimensions of water supply connection: 1/2", Flow rate (3 bar): 9 l/min, Silicone nubs	245 x 110 mm	0.16 kg	UV0652014
Hand shower MinusFlow, Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Flow rate (3 bar): 9 l/min, Silicone nubs	245 x 110 mm	0.2 kg	UV0652015
Hand shower MinusFlow, Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Flow rate (3 bar): 9 l/min, Silicone nubs	245 x 110 mm	0.2 kg	UV0652016
Hand shower MinusFlow, Spray mode: Rain, Pulse, Mono, Dimensions of water supply connection: 1/2", Spray mode selection: Push button, Flow rate (3 bar): 9 l/min, Silicone nubs	240 x 120 mm	0.24 kg	UV0652017
Stick hand shower MinusFlow, Flow rate (3 bar): 9 l/min, Silicone nubs	187 x 25 mm	0.14 kg	UV0642001
Stick hand shower MinusFlow, Flow rate (3 bar): 9 l/min, Silicone nubs	212 x 22 mm	0.18 kg	UV0642002
Single lever shower mixer for exposed installation Chrome, Connection type for water supply connection: S-connections, Dimension of connection hose: 1/2", Centre distance: 150 mm ± 20 mm, Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Non-return valve in the hose connection, Flow rate (3 bar): 17,1 l/min	210 x 114 mm	0.9 kg	A14230001
Single lever shower mixer for exposed installation Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Non-return valve in the hose connection	255 x 106 mm	1.68 kg	CE4230000
Single lever mixer concealed set Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round	125 x 72 mm	1.1 kg	CE4210007
Single lever mixer concealed set Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts	125 x 88 mm	1.17 kg	WA4210007
Single lever mixer concealed set Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, 130x130 mm, Including functional unit, Including trim parts	130 x 76 mm	1.08 kg	MH4210007
Single lever shower mixer for concealed installation Number of outlets: 1, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 86 mm	1.75 kg	N14210010
Single lever shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round	170 x 82 mm	1.66 kg	CE4210010

Faucet Accessories Shower rail # UV06000030.. / UV06000030.. / UV0600003C.. / UV0600003C..

| < 100 mm > |


Suitable accessories for mm, Chrome, 700 mm, Chrome			
Hand shower Spray mode: Rain, Dimensions of water supply connection: 1/2", Silicone nubs	245 x 110 mm	0.16 kg	UV0650014
Hand shower Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Silicone nubs	245 x 110 mm	0.2 kg	UV0650016
Suitable accessories for mm, Chrome, 700 mm, Black Matt			
Single lever shower mixer for exposed installation Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 12,6 l/min, Noise class: II	272 x 103 mm	1.69 kg	C14230000
Thermostatic shower mixer for exposed installation Dimension of connection hose: 1/2", Thermostat cartridge, recommended operating pressure: 1 - 5 bar, Safety lock at 38 °C, Non-return valve in the hose connection, Noise class: II	338 x 103 mm	2.13 kg	C14220000
Thermostatic shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Thermostat cartridge, Safety lock at 38 °C, Outlet/Diverter: Shut-off valve, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 20,6 l/min, Escutcheon shape: Square, Including functional unit, Including trim parts	150 x 94 mm	1.8 kg	C14200015
Thermostatic shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Thermostat cartridge, Safety lock at 38 °C, Outlet/Diverter: Shut-off valve, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 20,6 l/min, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 94 mm	1.8 kg	C14200016
Single lever shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, Including functional unit, Including trim parts	150 x 77 mm	1.63 kg	C14210009
Single lever shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 77 mm	1.66 kg	C14210010
Single lever shower mixer for exposed installation Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Non-return valve in the hose connection	280 x 113 mm	3.4 kg	TU4230000
Single lever shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts	170 x 86 mm	1.8 kg	TU4210010
Single lever shower mixer for exposed installation Connection type for water supply connection: S-connections, Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Non-return valve in the hose connection	216 x 165 mm	1.66 kg	WA4230000

Faucet Accessories Shower rail # UV06000030.. / UV06000030.. / UV0600003C.. / UV0600003C..

| < 100 mm > |

Single lever shower mixer for exposed installation Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar	255 x 105 mm	2.07 kg	MH4230000
Single lever shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, Including functional unit, Including trim parts	150 x 82 mm	1.75 kg	MH4210010
Single lever shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts	170 x 92 mm	1.8 kg	WA4210010
Thermostatic shower mixer for exposed installation 1000 Dimension of connection hose: 1/2", Thermostat cartridge, recommended operating pressure: 1 - 5 bar, Safety lock at 38 °C, Non-return valve in the hose connection	303 x 113 mm	2.25 kg	TH4220000
Suitable accessories for 700 mm, Chrome, 700 mm, Black Matt			
Hand shower Spray mode: SilkRain, Pulse, Mono, Dimensions of water supply connection: 1/2", Spray mode selection: Push button, Silicone nubs	260 x 130 mm	0.3 kg	UV0650018
Hand shower Silicone nubs		0.29 kg	UV065G018
Shower rail Hand shower holder: height adjustable	810 x 60 mm	1.1 kg	UV0600005
Shower rail 100 mm, Hand shower holder: height adjustable	100 x 70 mm	0.36 kg	UV0600004
Shower rail Hand shower holder: height adjustable	700 x 70 mm	0.32 kg	UV0600003

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.

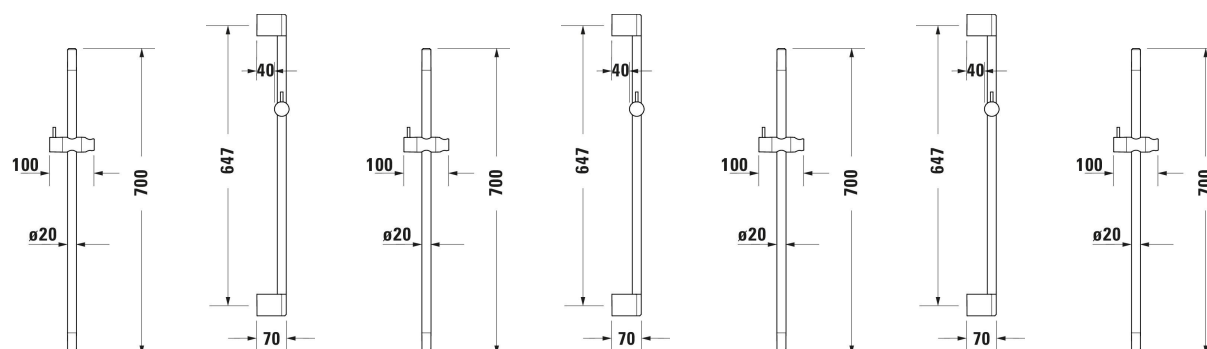

**Faucet Accessories Shower rail # UV06000030.. / UV06000030..
/ UV0600003C.. / UV0600003C..**

|< 100 mm >|

