

Faucet Accessories wall outlet # UV06300100.. / UV06300100.. / UV0630010C.. / UV0630010C..

|< 55 mm >|



| wall outlet | Dimension | Weight | Order number |
|---|--------------|----------|--------------|
| Square, Non-return valve: Individually, in the hose connection, Escutcheon shape: Square, Dimensions of water supply connection: DN 15 | | | |
| Colors | | | |
| 10 Chrome 46 Black Matt | | | |
| Variant | | | |
| Chrome, Hand shower holder: Fixed | | 0.300 kg | UV06300100.. |
| Black Matt, Hand shower holder: Fixed | | 0.300 kg | UV06300100.. |
| Chrome, Hand shower holder: Fixed | | 0.300 kg | UV0630010C.. |
| Black Matt, Hand shower holder: Fixed | | 0.300 kg | UV0630010C.. |
| Suitable accessories | | | |
| Hand shower Spray mode: Rain, Dimensions of water supply connection: 1/2", Silicone nubs | 245 x 110 mm | 0.16 kg | UV0650013 |
| Hand shower Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Silicone nubs | 245 x 110 mm | 0.2 kg | UV0650015 |
| Hand shower Spray mode: Rain, Pulse, Mono, Dimensions of water supply connection: 1/2", Spray mode selection: Push button, Silicone nubs | 240 x 120 mm | 0.24 kg | UV0650017 |
| Stick hand shower Dimensions of water supply connection: 1/2", Silicone nubs | 187 x 25 mm | 0.14 kg | UV0640001 |
| Stick hand shower Dimensions of water supply connection: 1/2", Silicone nubs | 212 x 22 mm | 0.18 kg | UV0640002 |
| Suitable accessories for Chrome, Hand shower holder: Fixed | | | |

Faucet Accessories wall outlet # UV06300100.. / UV06300100.. / UV0630010C.. / UV0630010C..

|< 55 mm >|

| | | | |
|--|-------------|---------|-----------|
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 86 mm | 2.2 kg | B15210012 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 87 mm | 2.15 kg | B25210012 |
| Single lever shower mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 86 mm | 2.2 kg | B14210012 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter valve, Security combination, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 86 mm | 2.15 kg | B15210018 |
| Single lever shower mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 87 mm | 2.15 kg | B24210012 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter valve, Security combination, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 87 mm | 2.12 kg | B25210018 |
| Bathtub thermostat for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Thermostat cartridge, Safety lock at 38 °C, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Shut-off and diverter valve, Security combination, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 20,6 l/min, Escutcheon shape: Square, Including functional unit, Including trim parts | 150 x 94 mm | 1.9 kg | C15200017 |

Faucet Accessories wall outlet # UV06300100.. / UV06300100.. / UV0630010C.. / UV0630010C..

|< 55 mm >|

| | | | |
|--|-------------|--------|-----------|
| Bathtub thermostat for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Thermostat cartridge, Safety lock at 38 °C, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Shut-off and diverter valve, Security combination, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 20,6 l/min, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 94 mm | 1.9 kg | C15200018 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter valve, Security combination, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 22,5 l/min, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 77 mm | 2 kg | C15210018 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter valve, Security combination, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 22,5 l/min, Escutcheon shape: Square, Including functional unit, Including trim parts | 150 x 77 mm | 2 kg | C15210017 |
| Single lever shower mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 80 mm | 2.1 kg | DE4210012 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Tub filler, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 80 mm | 2.1 kg | DE5210012 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Tub filler, Outlet/Diverter: Diverter valve, Security combination, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 80 mm | 2.2 kg | DE5210018 |
| Single lever shower mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 97 mm | 2.2 kg | WT4210012 |

Faucet Accessories wall outlet # UV06300100.. / UV06300100.. / UV0630010C.. / UV0630010C..

|< 55 mm >|

| | | | |
|--|--------------|---------|-----------|
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 22,5 l/min, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 97 mm | 2.2 kg | WT5210012 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter valve, Security combination, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 22,5 l/min, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 97 mm | 2.2 kg | WT5210018 |
| Single lever mixer concealed set Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts | 137 x 86 mm | 1.4 kg | N15210008 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Tub filler, Outlet/Diverter: Diverter valve, Security combination, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 22,5 l/min, Escutcheon shape: Round, Including functional unit, Including trim parts | 170 x 86 mm | 2.2 kg | TU5210018 |
| Hand shower MinusFlow, Spray mode: Rain, Dimensions of water supply connection: 1/2", Flow rate (3 bar): 9 l/min, Silicone nubs | 245 x 110 mm | 0.16 kg | UV0652014 |
| Hand shower MinusFlow, Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Flow rate (3 bar): 9 l/min, Silicone nubs | 245 x 110 mm | 0.2 kg | UV0652016 |
| Stick hand shower MinusFlow, Flow rate (3 bar): 9 l/min, Silicone nubs | 187 x 25 mm | 0.14 kg | UV0642001 |
| Single lever mixer concealed set Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter automatically reverts from hand shower to bath spout when turned off, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts | 125 x 73 mm | 1.58 kg | CE4210008 |
| Single lever mixer concealed set Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Outlet/Diverter: Diverter automatically reverts from hand shower to bath spout when turned off, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts | 125 x 89 mm | 1.63 kg | WA4210008 |
| Single lever mixer concealed set Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Outlet/Diverter: Diverter automatically reverts from hand shower to bath spout when turned off, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, 125x171 mm, Including functional unit, Including trim parts | 125 x 76 mm | 1.61 kg | MH4210008 |

Faucet Accessories wall outlet # UV06300100.. / UV06300100.. / UV0630010C.. / UV0630010C..

|< 55 mm >|

| | | | |
|---|--------------|---------|-----------|
| Single lever shower mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 86 mm | 1.75 kg | N14210012 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 86 mm | 1.75 kg | N15210012 |
| Single lever shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round | 170 x 82 mm | 1.9 kg | CE4210012 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Tub filler, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts | 170 x 82 mm | 1.9 kg | CE5210012 |
| Suitable accessories for Chrome, Hand shower holder: Fixed, Chrome, Hand shower holder: Fixed | | | |
| Hand shower Spray mode: Rain, Dimensions of water supply connection: 1/2", Silicone nubs | 245 x 110 mm | 0.16 kg | UV0650014 |
| Hand shower Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Silicone nubs | 245 x 110 mm | 0.2 kg | UV0650016 |
| Suitable accessories for Chrome, Hand shower holder: Fixed, Black Matt, Hand shower holder: Fixed | | | |
| Thermostatic shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Thermostat cartridge, Safety lock at 38 °C, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Shut-off and diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 20,6 l/min, Escutcheon shape: Square, Including functional unit, Including trim parts | 150 x 94 mm | 1.8 kg | C14200013 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 22,5 l/min, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 77 mm | 1.9 kg | C15210012 |
| Bathtub thermostat for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Thermostat cartridge, Safety lock at 38 °C, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Shut-off and diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 20,6 l/min, Escutcheon shape: Square, Including functional unit, Including trim parts | 150 x 94 mm | 1.9 kg | C15200013 |

Faucet Accessories wall outlet # UV06300100.. / UV06300100.. / UV0630010C.. / UV0630010C..

|< 55 mm >|


| | | | |
|---|--------------|---------|-----------|
| Thermostatic shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Thermostat cartridge, Safety lock at 38 °C, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Shut-off and diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 20,6 l/min, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 94 mm | 1.8 kg | C14200014 |
| Single lever shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, Including functional unit, Including trim parts | 150 x 77 mm | 1.88 kg | C14210011 |
| Single lever shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 77 mm | 1.9 kg | C14210012 |
| Bathtub thermostat for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Thermostat cartridge, Safety lock at 38 °C, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Shut-off and diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 20,6 l/min, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts | 170 x 94 mm | 1.8 kg | C15200014 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 22,5 l/min, Escutcheon shape: Square, Including functional unit, Including trim parts | 150 x 77 mm | 2.03 kg | C15210011 |
| Single lever shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Showerhead, Hand shower, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts | 170 x 86 mm | 2.2 kg | TU4210012 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Tub filler, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 22,5 l/min, Escutcheon shape: Round, Including functional unit, Including trim parts | 170 x 86 mm | 2.2 kg | TU5210012 |
| Hand shower MinusFlow, Spray mode: Rain, Dimensions of water supply connection: 1/2", Flow rate (3 bar): 9 l/min, Silicone nubs | 245 x 110 mm | 0.16 kg | UV0652013 |
| Hand shower MinusFlow, Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Flow rate (3 bar): 9 l/min, Silicone nubs | 245 x 110 mm | 0.2 kg | UV0652015 |

Faucet Accessories wall outlet # UV06300100.. / UV06300100.. / UV0630010C.. / UV0630010C..

|< 55 mm >|

| | | | |
|---|--------------|---------|-----------|
| Hand shower MinusFlow, Spray mode: Rain, Pulse, Mono, Dimensions of water supply connection: 1/2", Spray mode selection: Push button, Flow rate (3 bar): 9 l/min, Silicone nubs | 240 x 120 mm | 0.24 kg | UV0652017 |
| Stick hand shower MinusFlow, Flow rate (3 bar): 9 l/min, Silicone nubs | 212 x 22 mm | 0.18 kg | UV0642002 |
| Single lever shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Shut-off and diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, Including functional unit, Including trim parts | 150 x 82 mm | 2.15 kg | MH4210012 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, Including functional unit, Including trim parts | 150 x 82 mm | 2.2 kg | MH5210012 |
| Single lever bathtub mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Tub filler, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including trim parts | 170 x 92 mm | 2.2 kg | WA5210012 |
| Single lever shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Showerhead, Hand shower, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts | 170 x 92 mm | 2.2 kg | WA4210012 |
| Suitable accessories for Chrome, Hand shower holder: Fixed, Black Matt, Hand shower holder: Fixed | | | |
| Hand shower Spray mode: SilkRain, Pulse, Mono, Dimensions of water supply connection: 1/2", Spray mode selection: Push button, Silicone nubs | 260 x 130 mm | 0.3 kg | UV0650018 |
| Hand shower Silicone nubs | | 0.29 kg | UV065G018 |

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.

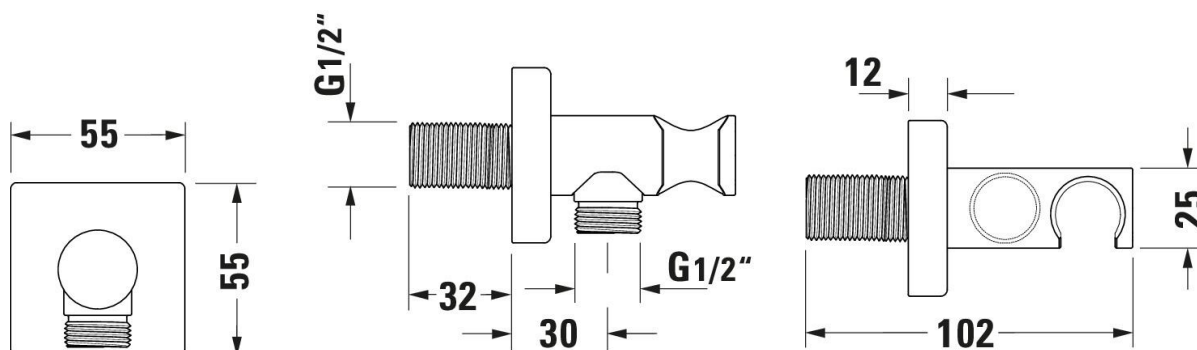

Faucet Accessories wall outlet # UV06300100.. / UV06300100.. /
UV0630010C.. / UV0630010C..

|< 55 mm >|

