

Wave Bathtub thermostat for exposed installation # WA52200000.. / WA52200000.. / WA5220000C.. / WA5220000C..

|< 42 mm >|




Bathtub thermostat for exposed installation	Dimension	Weight	Order number
Connection type for water supply connection: S-connections, Dimension of connection hose: 1/2", Centre distance: 150 mm ± 15 mm, Thermostat cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Safety lock at 38 °C, Diverter valve, Non-return valve in the hose connection, Shut-off and diverter valve, Flow rate (3 bar): 18 l/min			
Colors			
10 Chrome 46 Black Matt			
Variant			
Chrome		2.580 kg	WA52200000..
Black Matt		2.580 kg	WA52200000..
Chrome		2.580 kg	WA5220000C..
Black Matt		2.580 kg	WA5220000C..
Suitable accessories for Chrome			
Hand shower Spray mode: Rain, Dimensions of water supply connection: 1/2", Silicone nubs	245 x 110 mm	0.16 kg	UV0650014
Hand shower MinusFlow, Spray mode: Rain, Dimensions of water supply connection: 1/2", Flow rate (3 bar): 9 l/min, Silicone nubs	245 x 110 mm	0.16 kg	UV0652014
Hand shower Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Silicone nubs	245 x 110 mm	0.2 kg	UV0650016
Hand shower MinusFlow, Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Flow rate (3 bar): 9 l/min, Silicone nubs	245 x 110 mm	0.2 kg	UV0652016
Suitable accessories for Chrome, Black Matt			
Hand shower Spray mode: Rain, Dimensions of water supply connection: 1/2", Silicone nubs	245 x 110 mm	0.16 kg	UV0650013
Hand shower MinusFlow, Spray mode: Rain, Dimensions of water supply connection: 1/2", Flow rate (3 bar): 9 l/min, Silicone nubs	245 x 110 mm	0.16 kg	UV0652013

Wave Bathtub thermostat for exposed installation # WA52200000.. / WA52200000.. / WA5220000C.. / WA5220000C..

| < 42 mm > |

Hand shower Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Silicone nubs	245 x 110 mm	0.2 kg	UV0650015
Hand shower MinusFlow, Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Flow rate (3 bar): 9 l/min, Silicone nubs	245 x 110 mm	0.2 kg	UV0652015
Hand shower Spray mode: Rain, Pulse, Mono, Dimensions of water supply connection: 1/2", Spray mode selection: Push button, Silicone nubs	240 x 120 mm	0.24 kg	UV0650017
Hand shower MinusFlow, Spray mode: Rain, Pulse, Mono, Dimensions of water supply connection: 1/2", Spray mode selection: Push button, Flow rate (3 bar): 9 l/min, Silicone nubs	240 x 120 mm	0.24 kg	UV0652017
Stick hand shower Dimensions of water supply connection: 1/2", Silicone nubs	187 x 25 mm	0.14 kg	UV0640001
Stick hand shower MinusFlow, Flow rate (3 bar): 9 l/min, Silicone nubs	187 x 25 mm	0.14 kg	UV0642001
Stick hand shower Dimensions of water supply connection: 1/2", Silicone nubs	212 x 22 mm	0.18 kg	UV0640002
Stick hand shower MinusFlow, Flow rate (3 bar): 9 l/min, Silicone nubs	212 x 22 mm	0.18 kg	UV0642002
Hand shower holder Plastic, Hand shower holder: Fixed, Mounting bracket shape: Conical	38 x 58 mm	0.04 kg	UV0620001
Shower hose Rotation lock: Yes, Dimensions of water supply connection: 1/2", Nut shape: Conical	1250 x 23 mm	0.28 kg	UV0610006
Shower hose Rotation lock: Yes, Dimensions of water supply connection: 1/2", Nut shape: Conical	1600 x 23 mm	0.34 kg	UV0610007
Shower hose Rotation lock: Yes, Dimensions of water supply connection: 1/2", Nut shape: Conical	1800 x 23 mm	0.37 kg	UV0610008
Hand shower holder Brass, Hand shower holder: Fixed, Escutcheon shape: Round, Mounting bracket shape: Conical	55 x 102 mm	0.3 kg	UV0620007
Hand shower holder Brass, Hand shower holder: Fixed, Escutcheon shape: Square, Mounting bracket shape: Conical	55 x 102 mm	0.3 kg	UV0620026

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.

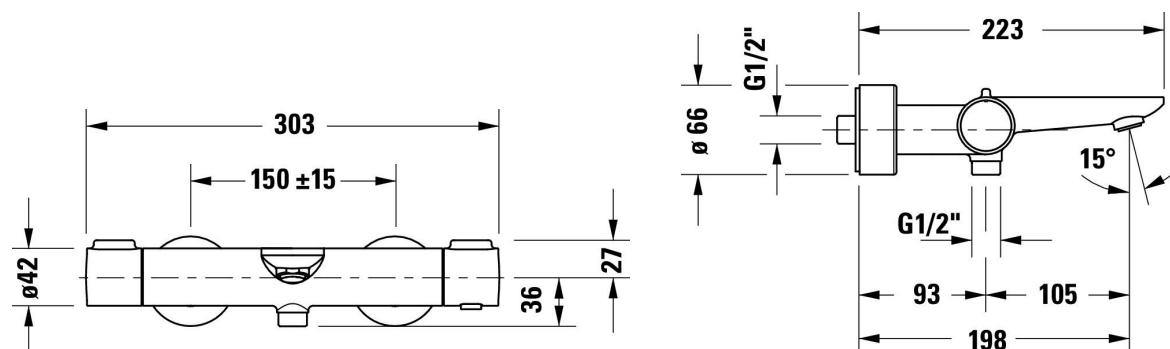

Wave Bathtub thermostat for exposed installation #
WA52200000.. / WA52200000.. / WA5220000C.. / WA5220000C..

|< 42 mm >|

