

Faucet Accessories Shower rail # UV06000050.. / UV06000050.. / UV06000050..

|< 99 mm >|



Shower rail	Dimension	Weight	Order number
Hand shower holder: height adjustable			
Colors			
05 Chrome White High Gloss 10 Chrome 46 Black Matt			
Variant			
810 mm, Chrome/White High Gloss		1.000 kg	UV06000050..
810 mm, Chrome		1.100 kg	UV06000050..
810 mm, Black Matt		0.800 kg	UV06000050..
Suitable accessories for 810 mm, Chrome/White High Gloss			
Single lever shower mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Non-return valve in the hose connection, Noise class: II	209 x 133 mm	1.4 kg	B14230000
Thermostatic shower mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Thermostat cartridge, recommended operating pressure: 1 - 5 bar, Safety lock at 38 °C, Diverter valve, Non-return valve in the hose connection, Noise class: II	260 x 118 mm	1.8 kg	B14220000
Single lever shower mixer for concealed installation Number of outlets: 1, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 86 mm	1.8 kg	B14210010
Single lever shower mixer for concealed installation Number of outlets: 1, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 87 mm	1.75 kg	B24210010

Faucet Accessories Shower rail # UV06000050.. / UV06000050.. / UV06000050..

|< 99 mm >|

Single lever shower mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Non-return valve in the hose connection, Noise class: II	179 x 137 mm	1.3 kg	B24230000
Thermostatic shower mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Thermostat cartridge, recommended operating pressure: 1 - 5 bar, Safety lock at 38 °C, Diverter valve, Non-return valve in the hose connection, Noise class: II	260 x 113.5 mm	1.8 kg	B24220000
Single lever shower mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 3 - 5 bar, Non-return valve in the hose connection, Flow rate (3 bar): 18,5 l/min	209 x 140 mm	1.33 kg	DE4230000
Single lever shower mixer for concealed installation Number of outlets: 1, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 80 mm	1.8 kg	DE4210010
Single lever shower mixer for concealed installation Number of outlets: 1, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 97 mm	1.8 kg	WT4210010
Single lever shower mixer for exposed installation Chrome, Connection type for water supply connection: S-connections, Dimension of connection hose: 1/2", Centre distance: 150 mm ± 10 mm, Ceramic cartridge, recommended operating pressure: 1 - 5 bar	215 x 128 mm	0.9 kg	N14230000
Single lever mixer concealed set Number of outlets: 1, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts	115 x 83 mm	0.7 kg	N14210007
Single lever shower mixer for exposed installation Chrome, Connection type for water supply connection: S-connections, Dimension of connection hose: 1/2", Centre distance: 150 mm ± 20 mm, Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Non-return valve in the hose connection, Flow rate (3 bar): 17,1 l/min	210 x 114 mm	0.9 kg	A14230001
Single lever shower mixer for exposed installation Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Non-return valve in the hose connection	255 x 106 mm	1.68 kg	CE4230000
Single lever mixer concealed set Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round	125 x 72 mm	1.1 kg	CE4210007
Single lever mixer concealed set Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts	125 x 88 mm	1.17 kg	WA4210007

Faucet Accessories Shower rail # UV06000050.. / UV06000050.. / UV06000050..

|< 99 mm >|


Single lever mixer concealed set Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, 130x130 mm, Including functional unit, Including trim parts	130 x 76 mm	1.08 kg	MH4210007
Single lever shower mixer for concealed installation Number of outlets: 1, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 86 mm	1.75 kg	N14210010
Single lever shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round	170 x 82 mm	1.66 kg	CE4210010
Suitable accessories for 810 mm, Chrome/White High Gloss, 810 mm, Black Matt			
Single lever shower mixer for exposed installation Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 12,6 l/min, Noise class: II	272 x 103 mm	1.69 kg	C14230000
Thermostatic shower mixer for exposed installation Dimension of connection hose: 1/2", Thermostat cartridge, recommended operating pressure: 1 - 5 bar, Safety lock at 38 °C, Non-return valve in the hose connection, Noise class: II	338 x 103 mm	2.13 kg	C14220000
Thermostatic shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Thermostat cartridge, Safety lock at 38 °C, Outlet/Diverter: Shut-off valve, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 20,6 l/min, Escutcheon shape: Square, Including functional unit, Including trim parts	150 x 94 mm	1.8 kg	C14200015
Thermostatic shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Thermostat cartridge, Safety lock at 38 °C, Outlet/Diverter: Shut-off valve, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 20,6 l/min, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 94 mm	1.8 kg	C14200016
Single lever shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, Including functional unit, Including trim parts	150 x 77 mm	1.63 kg	C14210009
Single lever shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 77 mm	1.66 kg	C14210010
Single lever shower mixer for exposed installation Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Non-return valve in the hose connection	280 x 113 mm	3.4 kg	TU4230000

Faucet Accessories Shower rail # UV06000050.. / UV06000050.. / UV06000050..

|< 99 mm >|

Single lever shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts	170 x 86 mm	1.8 kg	TU4210010
Single lever shower mixer for exposed installation Connection type for water supply connection: S-connections, Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Non-return valve in the hose connection	216 x 165 mm	1.66 kg	WA4230000
Single lever shower mixer for exposed installation Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar	255 x 105 mm	2.07 kg	MH4230000
Single lever shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, Including functional unit, Including trim parts	150 x 82 mm	1.75 kg	MH4210010
Single lever shower mixer for concealed installation Number of outlets: 1, Connection type for water supply connection: Basic Set, Ceramic cartridge, Number of outlets: 1, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts	170 x 92 mm	1.8 kg	WA4210010
Thermostatic shower mixer for exposed installation 1000 Dimension of connection hose: 1/2", Thermostat cartridge, recommended operating pressure: 1 - 5 bar, Safety lock at 38 °C, Non-return valve in the hose connection	303 x 113 mm	2.25 kg	TH4220000
Shower rail Hand shower holder: height adjustable	810 x 60 mm	1.1 kg	UV0600005
Shower rail 100 mm, Hand shower holder: height adjustable	100 x 70 mm	0.36 kg	UV0600004
Shower rail Hand shower holder: height adjustable	700 x 70 mm	0.32 kg	UV0600003

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.

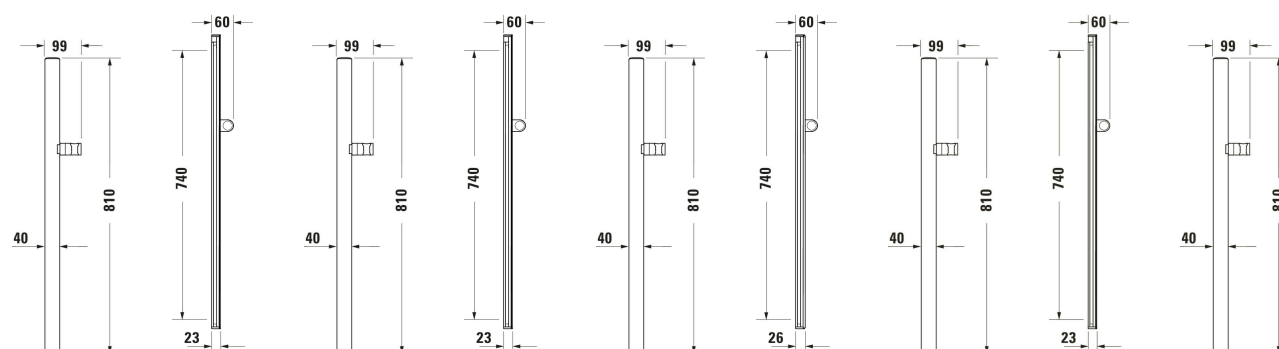

Faucet Accessories Shower rail # UV06000050.. / UV06000050..
/ UV06000050..

|< 99 mm >|

