

Faucet Accessories Hand shower holder # UV06200070../
UV06200070../ UV06200070../ UV06200070../ UV06200070../

|< 55 mm >|



| Hand shower holder | Dimension | Weight | Order number |
|--|--------------|----------|--------------|
| Brass, Hand shower holder: Fixed, Escutcheon shape: Round, Mounting bracket shape: Conical | | | |
| Colors | | | |
| 04 Brushed Bronze 10 Chrome 34 Polished Gold 46 Black Matt 70 Brushed Stainless Steel | | | |
| Variant | | | |
| bronze Brushed | | 0.300 kg | UV06200070.. |
| Chrome | | 0.300 kg | UV06200070.. |
| Gold Polished | | 0.300 kg | UV06200070.. |
| Black Matt | | 0.300 kg | UV06200070.. |
| Stainless steel Brushed | | 0.300 kg | UV06200070.. |
| Suitable accessories | | | |
| Single lever bathtub mixer for exposed installation Connection type for water supply connection: S-connections, Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Diverter valve, Non-return valve in the hose connection, Diverter automatically reverts from hand shower to bath spout when turned off | 216 x 198 mm | 1.76 kg | WA5230000 |
| Suitable accessories for bronze Brushed, Stainless steel Brushed, Gold Polished | | | |
| Hand shower MinusFlow, Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Flow rate (3 bar): 9 l/min, Silicone nubs | 245 x 110 mm | 0.2 kg | UV0652016 |
| Suitable accessories for bronze Brushed, Stainless steel Brushed, Gold Polished, Black Matt | | | |

Faucet Accessories Hand shower holder # UV06200070.. / UV06200070.. / UV06200070.. / UV06200070..

|< 55 mm >|


| | | | |
|--|--------------|---------|-----------|
| Hand shower MinusFlow, Spray mode: Rain, Pulse, Mono, Dimensions of water supply connection: 1/2", Spray mode selection: Push button, Flow rate (3 bar): 9 l/min, Silicone nubs | 240 x 120 mm | 0.24 kg | UV0652017 |
| Stick hand shower MinusFlow, Flow rate (3 bar): 9 l/min, Silicone nubs | 187 x 25 mm | 0.14 kg | UV0642001 |
| Suitable accessories for Chrome | | | |
| Single lever bathtub mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Diverter valve, Non-return valve in the hose connection, Diverter automatically reverts from hand shower to bath spout when turned off, Noise class: II | 209 x 171 mm | 1.6 kg | B15230000 |
| Single lever bathtub mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Diverter valve, Non-return valve in the hose connection, Diverter automatically reverts from hand shower to bath spout when turned off, Noise class: II | 182 x 170 mm | 1.68 kg | B25230000 |
| Single lever bathtub mixer for exposed installation Chrome, Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Diverter valve, Non-return valve in the hose connection, Diverter automatically reverts from hand shower to bath spout when turned off, Flow rate (3 bar): 20,9 l/min | 208 x 136 mm | 1.41 kg | DE5230000 |
| Single lever bathtub mixer for exposed installation Chrome, Connection type for water supply connection: S-connections, Dimension of connection hose: 1/2", Centre distance: 150 mm ± 10 mm, Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Diverter valve, Diverter automatically reverts from hand shower to bath spout when turned off | 216 x 178 mm | 1.3 kg | N15230000 |
| Single lever bathtub mixer for exposed installation Chrome, Connection type for water supply connection: S-connections, Dimension of connection hose: 1/2", Centre distance: 150 mm ± 20 mm, Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Diverter valve, Non-return valve in the hose connection, Diverter automatically reverts from hand shower to bath spout when turned off, Flow rate (3 bar): 15,5 l/min | 210 x 166 mm | 1.3 kg | A15230001 |
| Single lever bathtub mixer for exposed installation Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Diverter valve, Non-return valve in the hose connection, Diverter valve | 290 x 201 mm | 1.96 kg | CE5230000 |
| Suitable accessories for Chrome, Black Matt | | | |
| Single lever bathtub mixer for exposed installation Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Diverter valve, Non-return valve in the hose connection, Diverter valve, Noise class: II | 314 x 190 mm | 2.35 kg | C15230000 |
| Bathtub thermostat for exposed installation Dimension of connection hose: 1/2", Thermostat cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Safety lock at 38 °C, Diverter valve, Non-return valve in the hose connection, Shut-off and diverter valve, Noise class: II | 338 x 190 mm | 2.55 kg | C15220000 |

Faucet Accessories Hand shower holder # UV06200070.. / UV06200070.. / UV06200070.. / UV06200070..

|< 55 mm >|

| | | | |
|---|--------------|----------|-----------|
| Single lever bathtub mixer for exposed installation Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Diverter valve, Non-return valve in the hose connection, Diverter valve | 313 x 191 mm | 3.9 kg | TU5230000 |
| Bathtub thermostat for exposed installation Connection type for water supply connection: S-connections, Dimension of connection hose: 1/2", Centre distance: 150 mm ± 15 mm, Thermostat cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Safety lock at 38 °C, Diverter valve, Non-return valve in the hose connection, Shut-off and diverter valve, Flow rate (3 bar): 18 l/min | 303 x 223 mm | 2.58 kg | WA5220000 |
| Single lever bathtub mixer for exposed installation Dimension of connection hose: 1/2", Ceramic cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Diverter valve | 286 x 213 mm | 2.57 kg | MH5230000 |
| Hand shower MinusFlow, Spray mode: Rain, Dimensions of water supply connection: 1/2", Flow rate (3 bar): 9 l/min, Silicone nubs | 245 x 110 mm | 0.16 kg | UV0652013 |
| Hand shower MinusFlow, Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Flow rate (3 bar): 9 l/min, Silicone nubs | 245 x 110 mm | 0.2 kg | UV0652015 |
| Stick hand shower MinusFlow, Flow rate (3 bar): 9 l/min, Silicone nubs | 212 x 22 mm | 0.18 kg | UV0642002 |
| Hand shower holder Brass, Hand shower holder: Fixed, Escutcheon shape: Square, Mounting bracket shape: Conical | 55 x 102 mm | 0.3 kg | UV0620026 |
| Hand shower holder Brass, Hand shower holder: Fixed, Escutcheon shape: Round, Mounting bracket shape: Conical | 55 x 102 mm | 0.3 kg | UV0620007 |
| Hand shower holder Plastic, Hand shower holder: Fixed, Mounting bracket shape: Conical | 38 x 58 mm | 0.04 kg | UV0620001 |
| Hand shower holder Plastic, Hand shower holder: Fixed, Mounting bracket shape: Conical | 52 x 34 mm | 0.027 kg | UV0620000 |

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.

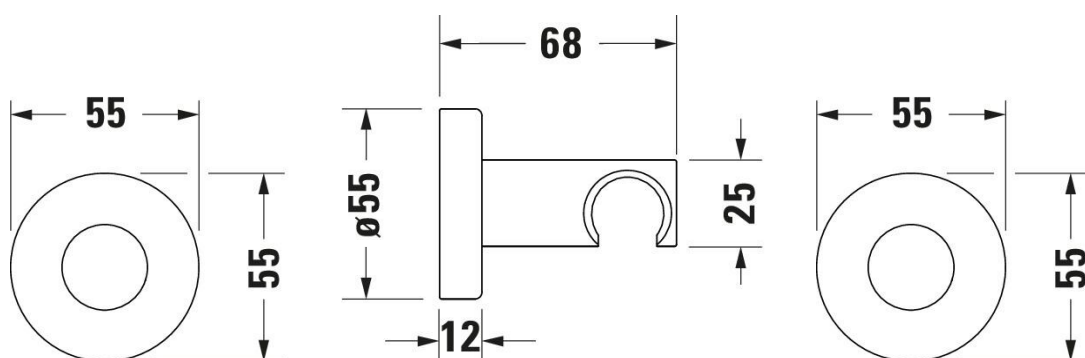

Faucet Accessories Hand shower holder # UV06200070../
 UV06200070../ UV06200070../ UV06200070../ UV06200070../

| < 55 mm > |

