


DuraSystem® Mechanical actuator plate for WC Beta 100 # WD5009..1000 / WD5009..1000 / WD5009..1000

| < 230 mm > |

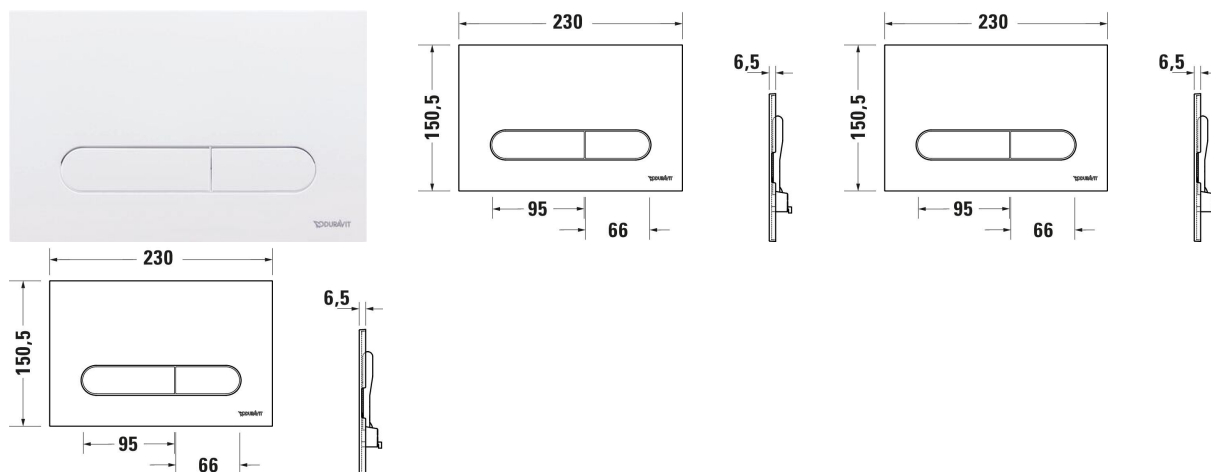

Mechanical actuator plate for WC Beta 100	Dimension	Weight	Order number
Plastic, Dual Flush, Flush operation: Mechanical, Flush operation technology: Manual, Type of installation: surface mounted, Incl. installation frame, Including mounting kit, Incl. push rod			
Colors			
01 White 02 Polished Chrome 03 Black Matte			
Variant			
		0.263 kg	WD5009..1000
		0.271 kg	WD5009..1000
		0.267 kg	WD5009..1000
Suitable products for			
Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 660 mm, Height adjustable: 200 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Self-supporting, Suitable for panelling with plasterboards	500 x 126 mm	11.782 kg	WD1029
Installation element wet installation for WC Type of installation: For walling in and out, Type of mounting: Wet installation, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation	422 x 80 mm	5.707 kg	WD1030

DuraSystem® Mechanical actuator plate for WC Beta 100 #
WD5009..1000 / WD5009..1000 / WD5009..1000

| < 230 mm > |

<p>Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Height adjustable: 150 mm, Flush operation: Mechanical, Flush operation position: Top, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Self-supporting, Suitable for panelling with plasterboards</p>	500 x 90 mm	11.251 kg	WD1031
<p>Installation element wet installation for WC Type of installation: For walling in and out, Type of mounting: Wet installation, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation</p>	419 x 82 mm	3.111 kg	WD1032

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.